Upright Cabinets

T-23PT-HC

Upright Foodservice Refrigerator, Pass-Thru, 1 Solid Door Front, 1 Solid Door Rear

Dimensions	
External Width (mm)	686
External Depth (mm)	818
External Height (mm)	2074
Net Volume (Litres)	438
Gross Volume (Litres)	651
Supplied Shelves	4
Shelf Size (L x D mm)	582 x 591
Internal Net Height (mm)	1300
Unpackaged Weight (kg)	137
Packaged Weight (kg)	148
Packaged Dimensions (W x D x H mm)	909 x 788 x 2134
Supplied with	Heavy duty lock-in-place ⌀ 64 mm castors (83 mm height)

Build	
Door Description	1 Solid Door Front + 1 Solid Door Rear
Door Opening	Right (standard) or Left
Exterior Construction	Stainless steel front and rear, aluminium sides
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.3
Watts	299
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Test Standard	EN 16825
EEC	C
Energy Efficiency Index	36.8
Defrost Type	Auto
Energy Consumption (kWh/24h)	1.34
Energy Consumption (kWh/Annum)	489

natural refrigerant

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland	0800 783 2049	TFIUK@truemfg.com
EMEA	+41 61 563 07 05	TrueCHCustomerService@truemfg.com
Australia	+61 2 9619 9999	TrueRefAus@truemfg.com

Upright Cabinets

T-23PT-HC

Upright Foodservice Refrigerator, Pass-Thru, 1 Solid Door Front, 1 Solid Door Rear

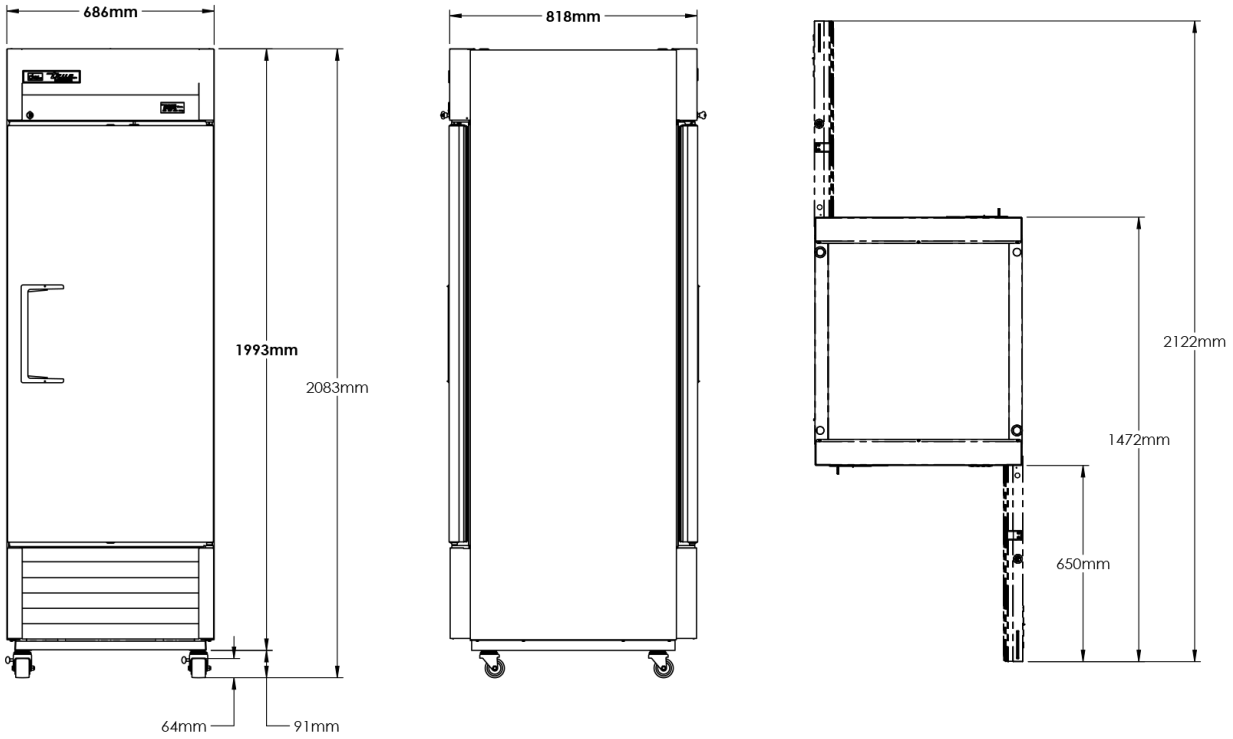

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland	0800 783 2049	TFIUK@truemfg.com
EMEA	+41 61 563 07 05	TrueCHCustomerService@truemfg.com
Australia	+61 2 9619 9999	TrueRefAus@truemfg.com